


# APD 1100 M

Mitsubishi

Diesel



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	1100,00	880,00	1030,00	824,00	1488,00

fPQDE

GC, ) &

,) & z

fDF DE

%\$!

%

%&

GC" \$(\*"

z&("

GC

## Standard Specifications

z

fl

!

E

z

TRANSFER SWITCH

# APD 1100 M

Mitsubishi


D+' &'

Manufacturer		Mitsubishi
Model		S12H-PTA
		%\$\$' "# "
		1020,00 kw [1367,00HP]
	L	37,110
	"	150X175
		14:1
	fl # 7	"# " 1500
	fl 7	L 200,00
		L 244,00
AbsorbedAirDischargeReSourceKey.Text	' # "	83,00
	' # "	1800,00
		24 V d.c.
	Load	%\$\$i
	# "	
		226,00

		ECO43-1LN/4
	Hz	50
	"	1100,00
7 cg'		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 1100 M	8940,00	4400,00	2100,00	2200,00	1500,00
		fl 7		fl 7	
	"	"	"	"	L
AK 96	12590	7500	2300	2495	1500

D+' &'

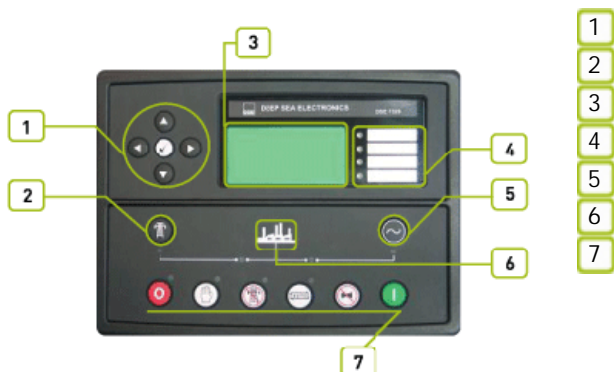

# APD 1100 M

Mitsubishi

D+&''



1

'8G9ž +&\$ž )5ž&&\$#(\$

2

3

4

'8G9+' &\$ ž &&\$ ž fi  
"8G9+' &\$ ž  
'8G9+' &\$ ž  
% &l '\* ( ž  
žFG&' &žFG(,) ž  
ž

# APD 1100 M

Mitsubishi

D+&'



f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

f&%) +L

f&)(, L

f&%) \$L

6G'9B '\*\$-\$)' \$

6G'9B '\*%\$\$\$!\*!&

6G'9B '\*%\$\$\$!\*!(

GA 8

!&+""

%, !&\*(

&(\$)

ž


ž

ž

# APD 1100 M

Mitsubishi

D+' &'

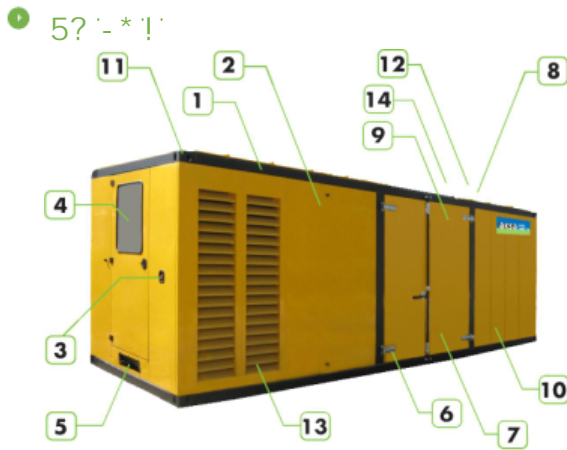

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	2495
	L	1500